


BMR-BK01 油口连接尺寸

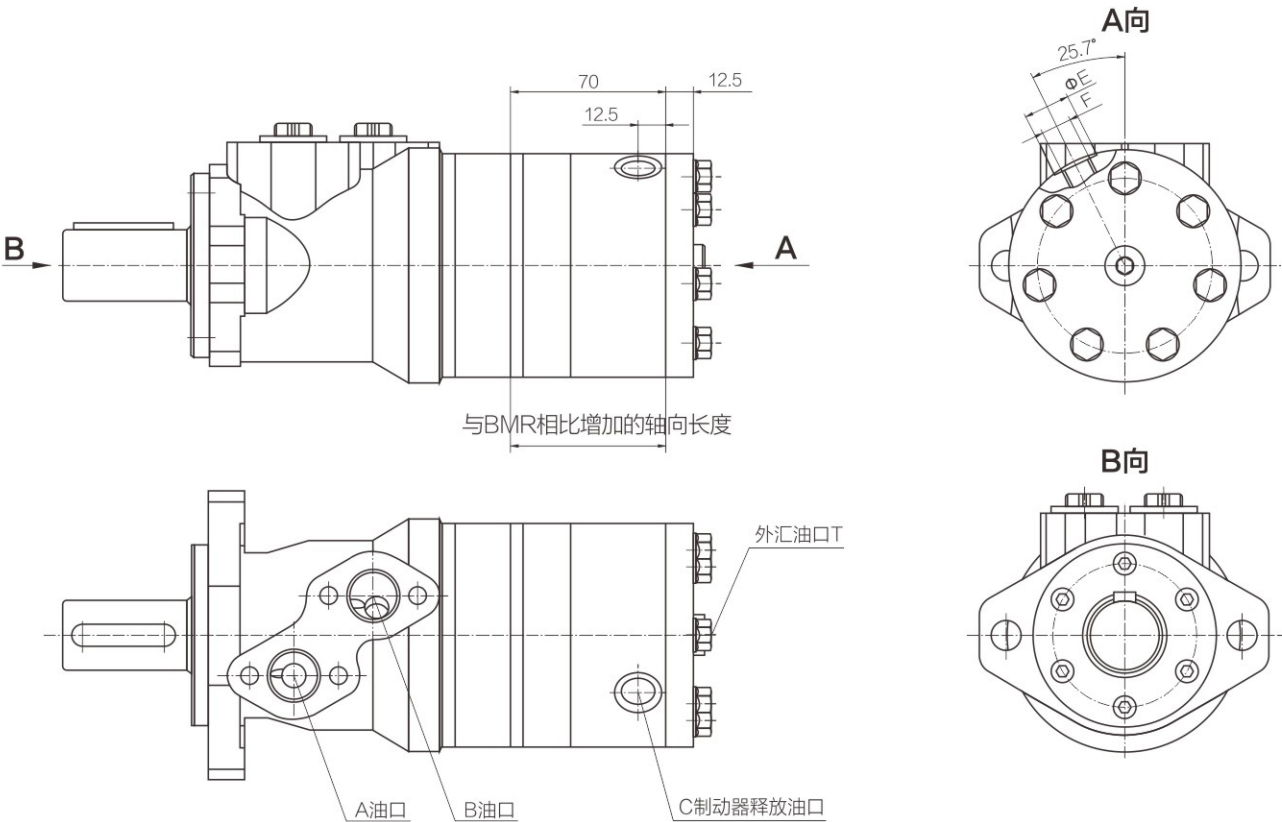

订货信息

订货信息

		1		2		3		4		5		6		7		8			
		BMR-BK01				-				-				-					
1	2	3				4				5				6		7		8	
型号	排量	法兰、止口				轴伸				油口、外泄口				制动器释放油口		旋向工况		油漆选项	
BMR-BK01	50	2 4 H H5	2-φ13.5菱法兰, 止口φ82.5×8 4-φ13.5菱法兰, 止口φ82.5×8 4-3/8-16方法兰, 止口φ44.4×2.8 4-M10方法兰, 止口φ44.4×2.8		A	φ25轴, 平键8×7×32	D	G1/2板式4×M8, G1/4	M	M22×1.5板式4×M8, M14×1.5	G	G1/4 深9 铰平φ22	无	标准	00	不油漆			
	80				B	φ32轴, 平键10×8×45													
	100				C	φ25.4轴, 平键6.35×6.35×31.75													
	125				E	φ25.4轴, 花键SAE 6B													
	160				R	φ25.4短轴, 平键6.35×6.35×31.75													
	200				F	φ31.75轴, 花键14-DP12/14													
	250				FD	φ31.75长轴, 花键14-DP12/14													
	315				G	φ31.75轴, 平键7.96×7.96×31.75													
	375				T	φ28.56锥轴, 平键B5×5×14											R	PT(Rc)1/2板式4×M8, PT(Rc)1/4	