


外形安装图 Installation

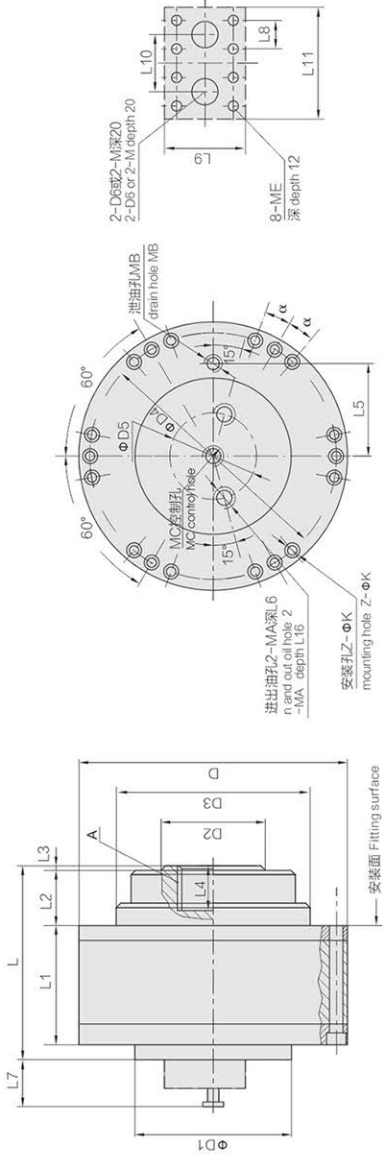

型 号 Model	L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	D	D1	D2	D3	D4	Z-ΦK	D5	D6	MA	MB	MC	ME	α	A	重量 Weight (kg)
1QJM001-**-**	101	58	38	5	20	43	20	37	-	37	35	63	Φ140	-	Φ60	Φ110g6	Φ128	12-Φ6.5	-	M18×1.5	-	M12×1.5	-	-	10°	6-48H11×42H11×12D9	7
1QJM01-**-**	130	80	37	3	30	62	20	-	-	-	-	-	Φ180	Φ105	Φ70	Φ130g7	Φ165	12-Φ9	Φ58	-	M27×2	M14×1.5	-	-	10°	6-48H11×42H11×12D9	15
1QJM02-**-**	162	99	38	3	34	62	20	-	-	-	-	-	Φ180	Φ105	Φ70	Φ130g7	Φ165	12-Φ9	Φ58	-	M27×2	M14×1.5	-	-	10°	6-48H11×42H11×12D9	24
2 ₁ QJM11-**-**	132	82	33	3	32	87	18	-	-	-	-	-	Φ240	Φ150	Φ110	Φ160g7	Φ220	12-Φ11	Φ69	-	M33×2	M16×1.5	M12×1.5	-	10°	6-70H11×62H11×16D9	28
2 ₂ QJM11-**-**	134	82	25	11	38	87	18	-	-	-	-	-	Φ240	Φ150	Φ60	Φ200g7	Φ220	12-Φ11	Φ69	-	M33×2	M16×1.5	-	-	10°	8-42H11×36H11×7D9	28
1QJM12-**-**	165	123	33	2	39	84	20	-	-	-	-	-	Φ240	Φ150	Φ110	Φ160g7	Φ220	12-Φ11	Φ69	-	M33×2	M16×1.5	M12×1.5	-	10°	6-90H11×80H11×20D9	39
2 ₁ QJM21-**-**	168	99	29	14	38	100	20	-	-	-	-	-	Φ304	Φ150	Φ110	Φ160g7	Φ283	12-Φ11	Φ69	M33×2	M22×1.5	M12×1.5	-	10°	6-90H11×80H11×20D9	50	
2LSQJM21-**-**	215	138	43	10	55	115	22	-	-	-	-	-	Φ320	Φ165	Φ120	Φ170g7	Φ299	12-Φ13	Φ79	M33×2	M22×1.5	M12×1.5	-	10°	10-98H11×92H11×14D9	70	
2 ₁ QJM32-**-**	215	138	43	10	55	115	22	95	-	52	71	165	-	-	-	-	-	-	-	-	-	-	-	-	10°	10-98H11×92H11×14D9	78
2LSQJM32-**-**	215	138	43	10	55	115	22	95	-	52	71	165	-	-	-	-	-	-	-	-	-	-	-	-	10°	10-98H11×92H11×14D9	78
2 ₁ QJM42-**-**	209	160	16	12	35	124	22	-	-	-	-	-	Φ350	Φ190	Φ140	Φ200g7	Φ320	12-Φ13	Φ100	Φ40	M42×2	M22×1.5	M16×1.5	10°	10-112H11×102H11×16D9	90	
2LSQJM42-**-**	207	158	23	5	35	124	22	151	73	105	104	204	Φ340	Φ190	Φ120	Φ170g7	Φ320	12-Φ13	Φ100	-	M42×2	M22×1.5	M16×1.5	10°	10-98H11×92H11×14D9	90	
1QJM42-**-**	207	158	23	5	35	124	22	-	-	-	-	-	Φ340	Φ190	Φ120	Φ170g7	Φ320	12-Φ13	Φ100	-	M42×2	M22×1.5	M16×1.5	10°	10-98H11×92H11×14D9	90	
2 ₁ QJM52-**-**	238	175	30	6	45	135	24	-	-	-	-	-	Φ420	Φ220	Φ160	Φ315g7	Φ360	6-Φ22	Φ110	Φ40	M48×2	M22×1.5	M16×1.5	6°	10-120H11×112H11×18D9	150	
2LSQJM52-**-**	238	175	30	6	45	135	24	144	73	101	105	220	Φ420	Φ220	Φ160	Φ315g7	Φ360	6-Φ22	Φ110	Φ40	M48×2	M22×1.5	M16×1.5	6°	10-120H11×112H11×18D9	160	
1QJM62-**-**	264	182	29	11	45	165	24	-	-	-	-	-	Φ485	Φ255	Φ170	Φ395g7	Φ435	6-Φ22	Φ128	Φ48	M48×2	M22×1.5	M16×1.5	6°	10-120H11×112H11×18D9	200	
2LSQJM62-**-**	264	182	29	11	45	165	24	144	73	101	123	255	Φ485	Φ255	Φ170	Φ395g7	Φ435	6-Φ22	Φ128	Φ48	M48×2	M22×1.5	M16×1.5	6°	10-120H11×112H11×18D9	212	

1QJM**---**型液压马达技术参数
1QJM**---** series technical data

型 号 Model	排量 Displacement (L/r)	额定压力 Rated Pressure (Mpa)	尖峰压力 Peak Pressure (Mpa)	转速范围 Rotational Speed Range (r/min)	额定输出扭矩 Rated Output Torque (N.m)	最大功率 Max. power (Kw)
1QJM001-0.08	0.083	10	16	8-500	123	5
1QJM001-0.10	0.104	10	16	8-400	154	5
1QJM002-0.2	0.2	10	16	8-320	295	8
1QJM01-0.1	0.10	10	16	8-800	148	10
1QJM01-0.16	0.163	10	16	8-630	241	12.5
1QJM01-0.2	0.203	10	16	8-500	300	12.5
1QJM02-0.32	0.326	10	16	5-400	483	13
1QJM02-0.4	0.406	10	16	5-320	600	13
1QJM11-0.32	0.339	10	16	5-400	468	20
1QJM11-0.4	0.404	10	16	5-400	598	20
1QJM11-0.5	0.496	10	16	5-320	734	20
1QJM11-0.63	0.664	10	16	4-250	983	20
1QJM12-0.8	0.8	10	16	4-250	1170	25
1QJM12-1.0	1.0	10	16	4-200	1480	25
1QJM12-1.25	1.33	10	16	2-160	1968	25
1QJM21-0.4	0.404	16	25	2-400	957	32
1QJM21-0.5	0.496	16	31.5	2-320	1175	32
1QJM21-0.63	0.664	16	31.5	2-250	1572	32
1QJM21-0.8	0.808	16	25	2-200	1913	32
1QJM21-1.0	1.01	10	16	2-160	1495	25
1QJM21-1.25	1.354	10	16	2-125	2004	25
1QJM21-1.6	1.65	10	16	2-100	2442	25
1QJM32-0.63	0.635	20	31.5	3-500	1880	80
1QJM32-0.8	0.808	20	31.5	3-500	2368	80
1QJM32-1.0	1.06	20	31.5	2-400	3138	80
1QJM32-1.25	1.295	20	31.5	2-320	3833	80
1QJM32-1.6	1.649	20	31.5	2-250	4881	80
1QJM32-2.0	2.03	16	25	2-200	4807	80
1QJM32-2.5	2.71	10	16	1-160	4011	62
1QJM32-3.2	3.2	10	16	1-125	4884	62
1QJM32-4.0	4.0	10	16	1-100	5920	62
1QJM42-2.0	2.11	20	31.5	1-320	6246	105
1QJM42-2.5	2.56	20	31.5	1-250	7578	105
1QJM42-3.2	3.24	10	16	1-200	4850	90
1QJM42-4.0	4.0	10	16	1-160	5920	90
1QJM42-4.5	4.6	10	16	1-125	6808	90
1QJM52-2.5	2.67	20	31.5	1-320	7903	130
1QJM52-3.2	3.24	20	31.5	1-250	9590	130
1QJM52-4.0	4.0	16	25	1-200	9472	130
1QJM52-5.0	5.23	10	16	1-160	7740	120
1QJM52-6.3	6.36	10	16	1-125	9413	120
1QJM62-4.0	4.0	20	31.5	0.5-150	11840	150
1QJM62-5.0	5.18	20	31.5	0.5-125	15333	150
1QJM62-6.3	6.27	16	25	0.5-125	14847	150
1QJM62-8.0	7.85	10	16	0.5-100	11618	121
1QJM62-10	10.15	10	16	0.5-80	15022	121

注：各型带支承和带阀组液压马达其技术参数与上表中对应的标准型液压马达技术参数相同。
Note: The technical data of the QJM series hydraulic motor with bearing or valve group is the same as the standard type hydraulic motor's in the table above.

2QJM**---**型液压马达技术参数
2QJM**---** series technical data

型 号 Model	排量 Displacement (L/r)	额定压力 Rated Pressure (Mpa)	尖峰压力 Peak Pressure (Mpa)	转速范围 Rotational Speed Range (r/min)	额定输出扭矩 Rated Output Torque (N.m)	最大功率 Max. power (Kw)
2QJM02-0.32	0.322 / 0.16	10	16	5-400	484 / 242	13
2QJM02-0.4	0.406 / 0.203	10	16	5-320	600 / 300	13
2QJM11-0.4	0.404 / 0.202	10	16	5-400	598 / 299	20
2QJM11-0.5	0.496 / 0.248	10	16	5-320	734 / 367	20
2QJM11-0.63	0.664 / 0.332	10	16	4-250	938 / 492	20
2QJM12-0.8	0.80 / 0.40	10	16	4-250	1170 / 585	25
2QJM12-1.0	1.0 / 0.5	10	16	4-200	1478 / 739	25
2QJM12-1.25	1.25 / 0.63	10	16	4-160	1870 / 935	25
2QJM21-0.32	0.317 / 0.1585	16	25	2-250	751 / 376	32
2QJM21-0.5	0.496 / 0.248	16	25	2-320	1175 / 588	32
2QJM21-0.63	0.664 / 0.332	16	25	2-250	1572 / 786	32
2QJM21-1.0	1.01 / 0.505	10	16	2-160	1495 / 748	25
2QJM21-1.25	1.354 / 0.677	10	16	2-125	2004 / 1002	25
2QJM21-1.6	1.65 / 0.825	10	16	2-100	2442 / 1221	25
2QJM32-0.63	0.635 / 0.318	20	31.5	3-500	1880 / 940	80
2QJM32-1.0	1.06 / 0.53	20	31.5	2-400	3138 / 1519	80
2QJM32-1.25	1.295 / 0.648	20	31.5	2-320	3833 / 1917	80
2QJM32-1.6	1.649 / 0.825	20	31.5	2-250	4881 / 2441	80
2QJM32-2.0	2.03 / 1.015	16	25	2-250	4807 / 2404	80
2QJM32-2.5	2.71 / 1.355	10	16	1-160	4011 / 2006	62
2QJM32-3.2	3.3 / 1.65	10	16	1-125	4844 / 2442	62
2QJM32-4.0	4.0 / 2.0	10	16	1-100	5920 / 2960	62
2QJM42-2.0	2.11 / 1.055	20	31.5	1-320	6246 / 3123	105
2QJM42-2.5	2.56 / 1.28	20	31.5	1-250	7578 / 3789	105
2QJM42-3.2	3.24 / 1.62	10	16	1-200	4850 / 2425	90
2QJM42-4.0	4.0 / 2.0	10	16	1-160	5920 / 2960	90
2QJM42-4.5	4.6 / 2.3	10	16	1-125	6808 / 3404	90
2QJM52-2.5	2.67 / 1.335	20	31.5	1-320	7903 / 3952	130
2QJM52-3.2	3.24 / 1.62	20	31.5	1-250	9590 / 4795	130
2QJM52-4.0	4.0 / 2.0	16	25	1-200	9472 / 4736	130
2QJM52-5.0	5.23 / 2.615	10	16	1-160	7740 / 3870	120
2QJM52-6.3	6.36 / 3.18	10	16	1-125	9413 / 4707	120
2QJM62-4.0	4.0 / 2.0	20	31.5	0.5-200	11840 / 5920	150
2QJM62-5.0	5.18 / 2.59	20	31.5	0.5-160	15333 / 7667	150
2QJM62-6.3	6.27 / 3.135	16	25	0.5-125	14847 / 7424	121
2QJM62-8.0	7.85 / 3.925	10	16	0.5-100	11618 / 5809	121
2QJM62-10	10.15 / 5.075	10	16	0.5-80	15022 / 7511	121
3QJM32-1.25	1.295 / 0.648 / 0.324	20	31.5	2-320	3833 / 1917 / 959	80
3QJM32-1.6	1.649 / 0.825 / 0.413	20	31.5	2-250	4881 / 2441 / 1221	80