



外形尺寸图

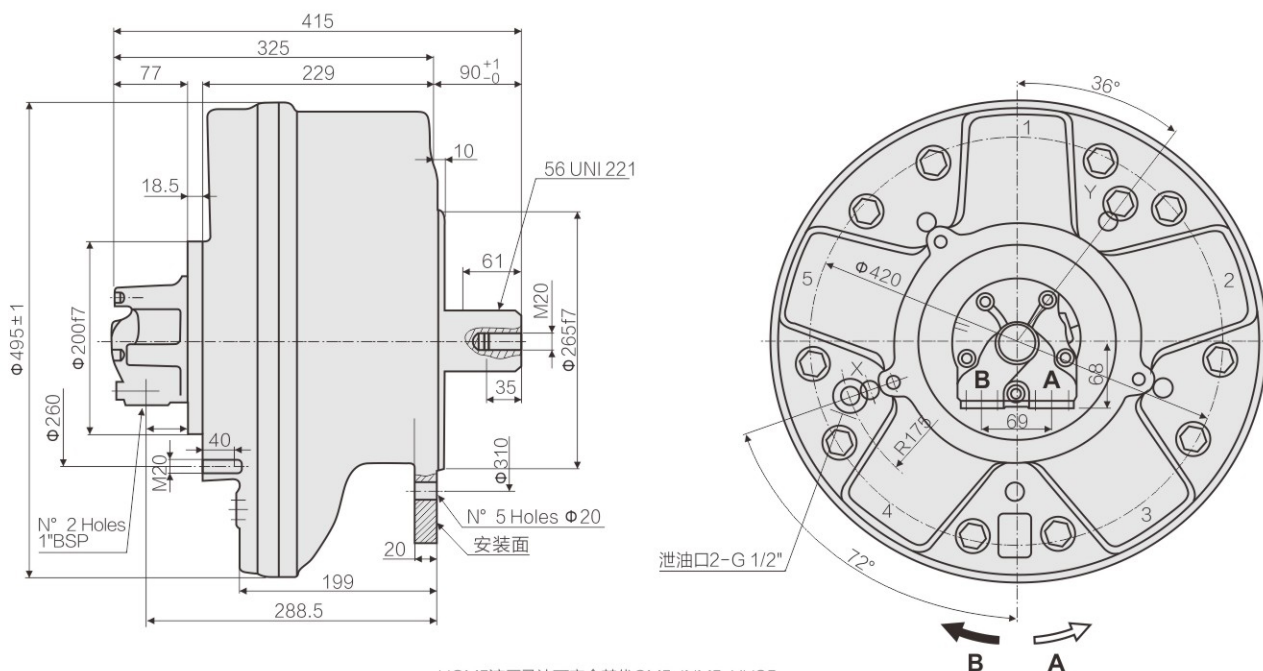


HGM5液压马达可完全替代GM5, INM5, XHS5
HGM5 can completely replace GM5, INM5, and XHS5.

轴伸型式


矩形外花键
Rectangular spline

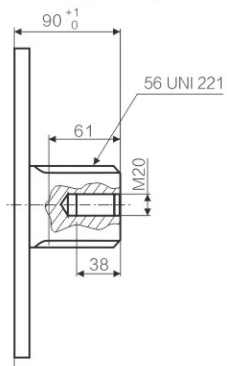


渐开线外花键 A
Involute spline A

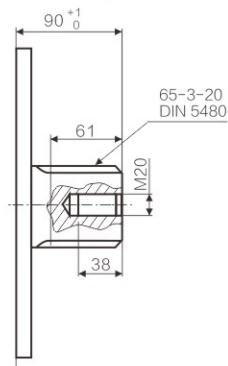

圆柱平键 B
Cylindrical flat key B

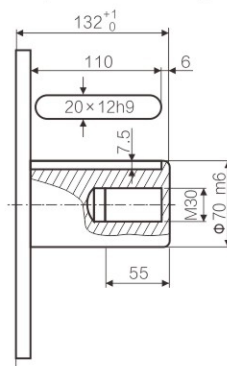

内花键 I
Internal spline I

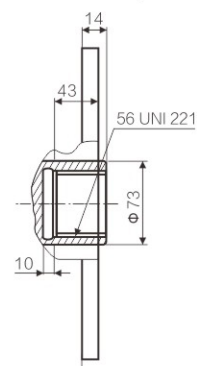

花键参数

DIN	65-3-20 DIN5480	55-2-26 DIN5482	55-3-17 DIN5480	56 UNI 221(10-56-65 DIN 5428)
d0	$\Phi 60.0$	$\Phi 52.0$	$\Phi 51.0$	d1 $\Phi 56.0 \pm 0.030$ H7
d1	$\Phi 65.0 \pm 0.740$ H14	$\Phi 55.0 \pm 0.300$ H12	$\Phi 55.0 \pm 0.740$ H14	d2 $\Phi 65.0 \pm 0.190$ H11
d2	$\Phi 59.0 \pm 0.190$ H11	$\Phi 50.0 \pm 0.160$ H11	$\Phi 49.0 \pm 0.160$ H11	A 10.0 ± 0.033 F7
A	$\Phi 5.25$	$\Phi 3.5$	$\Phi 5.25$	d3 $\Phi 56 \pm 0.029$ g6
da	$\Phi 54.101$ H11	$\Phi 46.902$ H10	$\Phi 43.807$ H11	d4 $\Phi 65.0 \pm 0.190$ H11
d3	$\Phi 64.4 \pm 0.190$ h11	$\Phi 54.5 \pm 0.190$ h11	$\Phi 54.4 \pm 0.190$ h11	B 10 ± 0.033 f7
d4	$\Phi 58.4 \pm 0.740$ h14	$\Phi 49.0 \pm 0.300$ h12	$\Phi 48.4 \pm 0.620$ h14	
B	$\Phi 6.0$	$\Phi 3.5$	$\Phi 6.0$	
db	$\Phi 70.999$ f8	$\Phi 56.953$ e8	$\Phi 60.873$ f8	

联轴器 Couplings

